


LED strip SMD 3528 (120LED/m) 5mm

Superior flexible strip - PROFI type - 5 years guarantee
REFOND LED packages are brighter than standard strip
Rolled copper PCB, LED from REFOND - LM80 approved
Wide applicability, easy to install and maintain, long lifespan.
Very flexible, easily be curved to any shape.
Extremely luminous, with wide viewing angle.
Energy saving and environmental conservation.
Products available also in waterproof IP 65, IP 67, IP 68



Electrical / Optical Characteristics

Item No.	Color	Correlated Color Temp. (K)	Operating Voltage	LED quantity / m	Length	Wattage (W/m)	Luminous Flux (lm/m)
3528-120-WW-(5m)	warm white	2700 - 3100 K	12V / 24V	120	5m	9.6	840
3528-240-NW-(5m)	natural white	4000 - 4500 K	12V / 24V	120	5m	9.6	900
3528-240-CW-(5m)	cool white	5900 - 6500 K	12V / 24V	120	5m	9.6	960

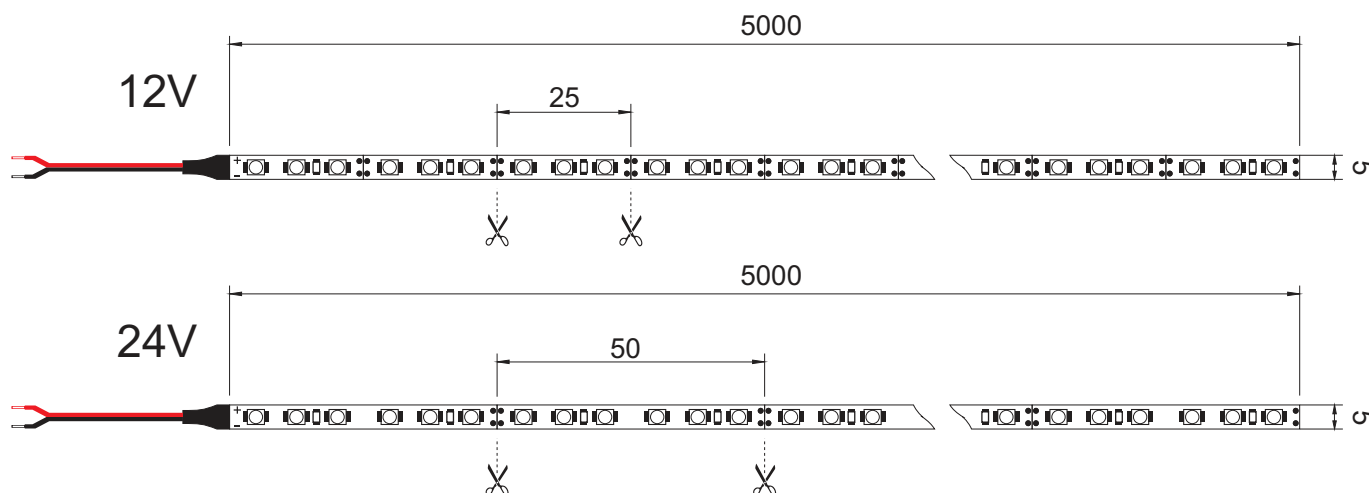

Installation of product (with power supply) needs to be made with regard to all applicable electrical and safety standards. Only qualified personnel should be allowed to perform installations.

