


LED strip SMD 3528 (120LED/m)


Superior flexible strip - PROFI type - 5 years guarantee
 REFOND LED packages are brighter than standard strip
 Rolled copper PCB, LM80 approved
 Wide applicability, easy to install and maintain, long lifespan.
 Very flexible, easily be curved to any shape.
 Extremely luminous, with wide viewing angle.
 Energy saving and environmental conservation.
 Products available also in waterproof IP 65, IP 67, IP 68



Electrical / Optical Characteristics

Electrical / Optical Characteristics					20mA type (standard)		30mA type	
Color	Correlated Color Temp. (K)	Operating Voltage	LED quantity / m	Length	Wattage (W/m)	Luminous Flux (lm/m)	Wattage (W/m)	Luminous Flux (lm/m)
S warm white	2200 - 2400 K	12V / 24V	120	5m	8	565	12	929
warm white	2700 - 3100 K	12V / 24V	120	5m	8	728	12	1092
natural white	4000 - 4500 K	12V / 24V	120	5m	8	810	12	1210
cool white	5900 - 6500 K	12V / 24V	120	5m	8	730	12	1086
red	N/A	12V / 24V	120	5m	8	N/A	12	N/A
green	N/A	12V / 24V	120	5m	8	N/A	12	N/A
blue	N/A	12V / 24V	120	5m	8	N/A	12	N/A

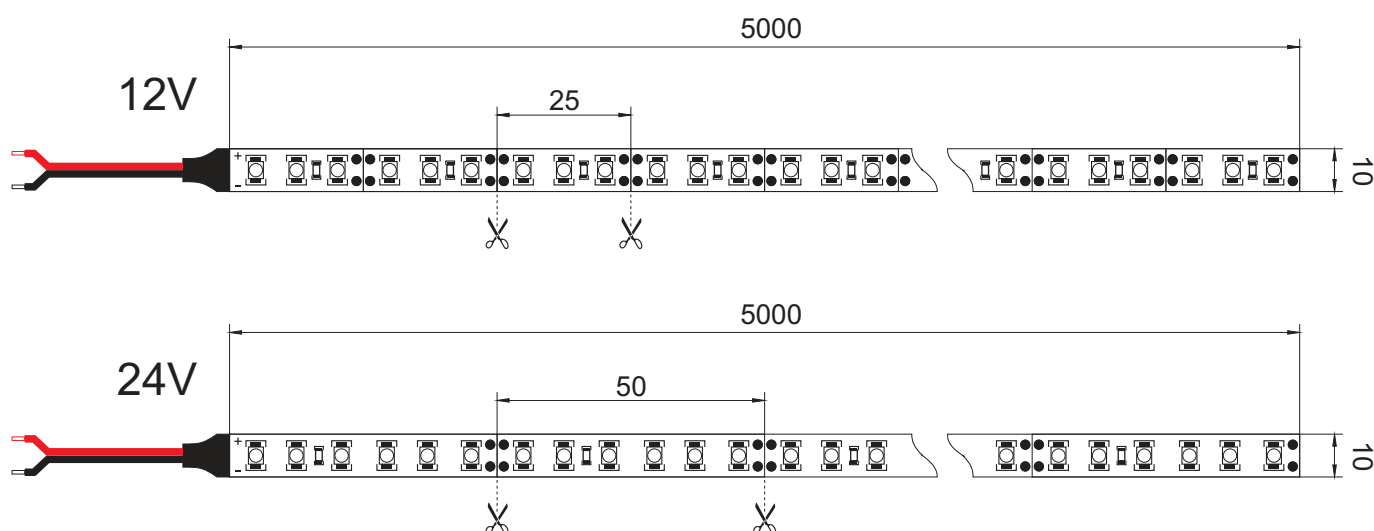

 Installation of product (with power supply) needs to be made with regard to all applicable electrical and safety standards. Only qualified personnel should be allowed to perform installations.

