


# LED strip SMD 3528 (240LED/m)


Superior flexible strip - PROFI type - 5 years guarantee  
 REFOND LED packages are brighter than standard strip  
 Rolled copper PCB, LM80 approved  
 Wide applicability, easy to install and maintain, long lifespan.  
 Very flexible, easily be curved to any shape.  
 Extremely luminous, with wide viewing angle.  
 Energy saving and environmental conservation.  
 Products available also in waterproof IP 65, IP 67, IP 68



## Electrical / Optical Characteristics

					20mA type	
Color	Correlated Color Temp. (K)	Operating Voltage	LED quantity / m	Length	Wattage (W/m)	Luminous Flux (lm/m)
S warm white	2200 - 2400 K	12V / 24V	240	5m	21	1750
warm white	2700 - 3100 K	12V / 24V	240	5m	21	1978
natural white	4000 - 4500 K	12V / 24V	240	5m	21	2230
cool white	5900 - 6500 K	12V / 24V	240	5m	21	2120
red	N/A	12V / 24V	240	5m	21	1978
green	N/A	12V / 24V	240	5m	21	2230
blue	N/A	12V / 24V	240	5m	21	2120

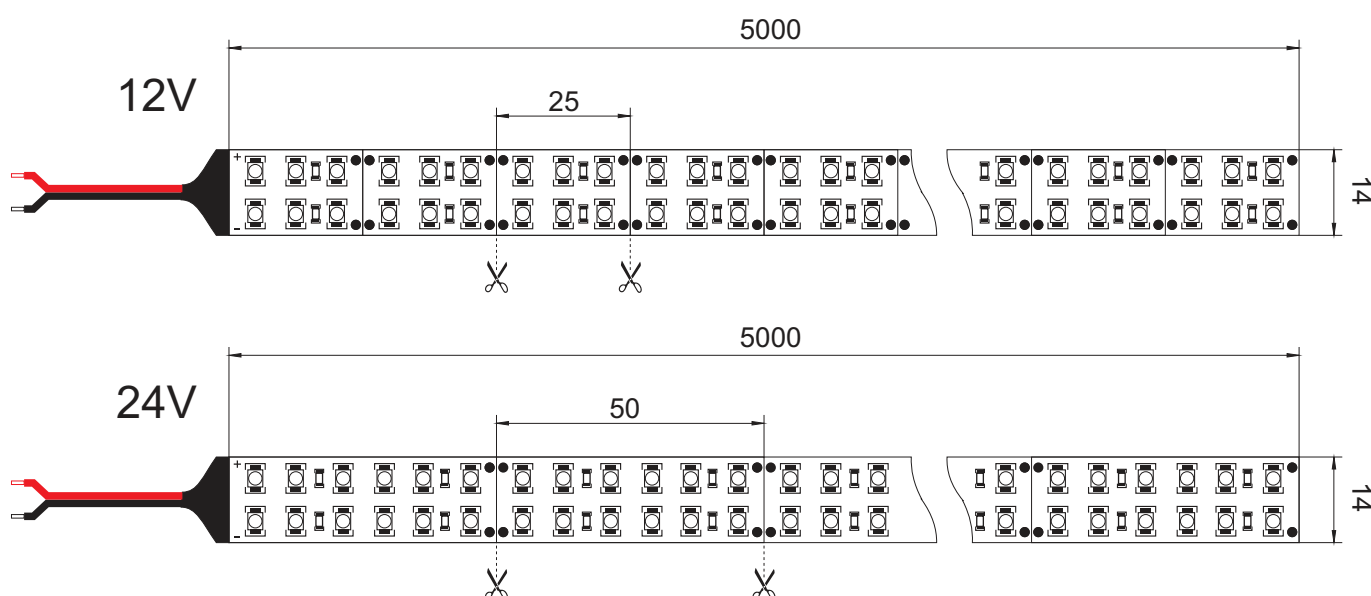

 Installation of product (with power supply) needs to be made with regard to all applicable electrical and safety standards. Only qualified personnel should be allowed to perform installations.

