


LED strip SMD 3528 (30LED/m)


Superior flexible strip - PROFI type - 5 years guarantee
 REFOND LED packages are brighter than standard strip
 Rolled copper PCB, LM80 approved
 Wide applicability, easy to install and maintain, long lifespan.
 Very flexible, easily be curved to any shape.
 Extremely luminous, with wide viewing angle.
 Energy saving and environmental conservation.
 Products available also in waterproof IP 65, IP 67, IP68



Electrical / Optical Characteristics

Color	Correlated Color Temp. (K)	Operating Voltage	LED quantity / m	Length	20mA type (standard)		30mA type	
					Wattage (W/m)	Luminous Flux (lm/m)	Wattage (W/m)	Luminous Flux (lm/m)
S warm white	2200 - 2400 K	12V / 24V	30	5m	1.8	N/A	3	N/A
warm white	2700 - 3100 K	12V / 24V	30	5m	1.8	N/A	3	N/A
natural white	4000 - 4500 K	12V / 24V	30	5m	1.8	N/A	3	N/A
cool white	5900 - 6500 K	12V / 24V	30	5m	1.8	N/A	3	N/A
red	N/A	12V / 24V	30	5m	1.8	N/A	3	N/A
green	N/A	12V / 24V	30	5m	1.8	N/A	3	N/A
blue	N/A	12V / 24V	30	5m	1.8	N/A	3	N/A

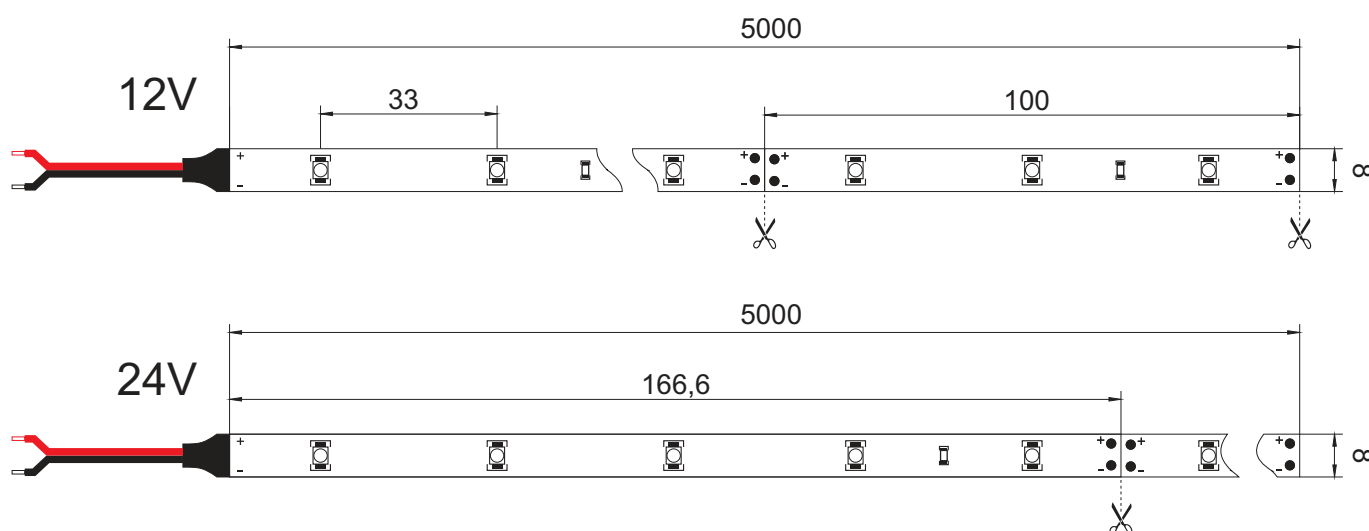

 Installation of product (with power supply) needs to be made with regard to all applicable electrical and safety standards. Only qualified personnel should be allowed to perform installations.

